GEOMETRICAL ENGINEERS B.V.



MasterScanner XPL-C

Series 200 | 300

PRECISION IN EVERY DETAIL

Smart precision.

In 1994, IAC invented the 2D Scanning technique. The company became a world-wide manufacturer of advanced measuring instruments and measuring machines for the calibration of thread gauges, and is the creator of custom solutions for a wide range of special applications.


Our most successful product since 1995 is the MasterScanner. Many well-known companies around the world use the MasterScanner's high accuracy and precision for the calibration of their thread gauges.



The MasterScanner is the only measuring machine in the world capable of a fully automated calibration, including all thread parameters of a part or a gauge in just a few minutes, and even compares the results with the dimensional tolerances of most popular standards. The MasterScanner is in many ISO 17025 accredited labs all around the world.

IAC manufactures three series of MasterScanners:

- · The XP series has a range from 1 mm OD to 160 mm ID
- · The XPL-C series has a range from 1 mm OD to 300 mm ID
- The XPL series is for very large gauges.from 1 mm OD to over 600 mm, including API!

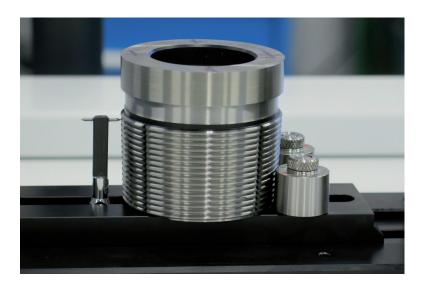


Sample of Master Scanner Reference List:

BMW, Volkswagen,
LMW Schmalkalden,
Bosch, Mahr, Trescal,
NASA, MG Marposs,
Fraisa, China AVIC,
Boeing, Endress +
Hauser, Curtiss Wright,
Spiralock Stanley
Black & Decker, Tamburini, Krauss-Maffei
Wegmann, Techmaster,
Baker Gauges,
NAMMO, NIST, PMC
Lonestar, etc.

Want unparalleled precision in calibration?

First, forget balls and wires.

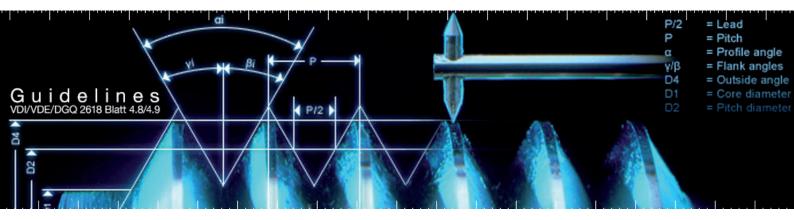

The MasterScanner fulfils all industrial requirements of today for the efficient measurement of plain and thread gauges.



The MasterScanner's excellent measurement uncertainty and sophisticated features make it the ideal instrument for **calibration laboratories**. Automated, fast and reliable calibration has been made

possible for a wide range of standard or tapered thread gage plugs, thread ring gages, plain rings and plugs.

Many thread gauge makers all over the world also apply the scanner for their **production control**. The MasterScanner has the unique capability to present in one automatic cycle, all of the information that is necessary for the optimal setting of the machine tools, so as to minimize bad products and scrap.

Over 1.500.000 calibrations

Because of the long lifetime quality, many MasterScanners have performed over 1.500.000 calibrations, and still are as accurate as if they were new!



All MasterScanners are calibrated by laser interferometer for **highest accuracy and optimal traceability**



The excellent accuracy is achieved by proven measurement technology.

The complete 2 dimensional intersection of the surface of the piece with a mathematical plane through the reference axis is composed by the sequential scanning of two opposite contours by a probe with two styli.

A special feature is that the actual shape of each of the two styli is automatic mapped multi-directionally for optimal correction of the probing system.

12000 high resolution measurements are taken per second of scanning, and stored in the memory of the computer. After scanning the first contour, the direction of the measuring force is reversed and the probe scans the opposite side of the gauge. Each measurement point has a resolution of 0,01 µm for each of the two axis, and is stored for data processing.

Direct after finalizing the scanning the MasterScanner calculates and presents the parameters: effective diameter, simple effective diameter, major diameter, minor diameter, pitch, partial flank angles, profile deficiencies,

taper, etc.

The patented COSIMEX Click-On support for

Cylindrical and Conical Plain and Threaded gauges:

- Both internal and external measurements on one COSIMEX Click-On system.
- \cdot High precision centering for thread gauges with steep taper,

such as NPTs



Dynamic Temperature Compensation

Measured dimensions are:

- · Effective pitch diameter
- · Simple effective pitch diameter
- · Effective diameter equivalent
- · Major diameter
- · Minor diameter
- · Pitch
- · Accumulated Pitch deviation
- · Flank angles
- · Partial Flank angles
- · laper
- · Profile deficiencies

Compliance is the best testimony.

And speed is essential for success.



The MasterScanner is compliant with all requirements for traceability as stated in ISO-9000 and ISO-17025.

The MasterScanner's internal library (IACLIB) is loaded with many worldwide thread specifications, covering tens of thousands of different threads. Once the technician selects the proper spec, the software automatically applies tolerances to the report, and graphs the measurements against the toler-

IACLIB integrates the following standards into the MasterScanner:

- · ANSI/ASME B1.2 Unified
- · ANSI/ASME B1.20 NPT
- · API Spec 5B (Incl. Buttress)
- · API Spec 7-2
- · BS 21 Pipe threads
- · BS 919/1 Unified
- · BS 919/2 Whitworth
- · BS 919/3 ISO Metric
- · GB/T 10922
- · GB/T 22512.2
- · ISO 7/2 Pipe threads
- · ISO 228 Pipe threads
- · ISO 286 Plain bores and shafts
- · ISO 1502 Metric
- · ISO 5855-2 MJ tread
- · JIS B 0251
- · JIS B 0252

· DIN 13 Metric

- · GOST 18465-73 Metric
- · GOST 16465-73 Metric
- · GOST 18466-73 Metric
- · QJ 2761 Chinese MJ thread
- · JB/T 10971 Chinese Locking thread
- · DIN 2999 Pipe threads
- \cdot DIN 7162 Plain rings and plugs
- · DIN 40401 Edison

and even more

ances. The software includes many fail-safes, preventing the operator from introducing human error into the measurement. All measured contours can be converted to DXF-format for further evaluation and analysis by means of a CAD system like AutoCAD.

Some of our software features are:

- Real-time Graphical visualizartion during scanning
- Measurements are compared with a huge library of International standards
- Easy data export into many widely used formats or custom styled Certificate
 Templates
- · Fast calculations of parameters



ISO/IEC 17025 Accreditation

The 2D Scanning method of the IAC MasterScanner complies with ISO/IEC 17025 acceptance standard and is at labs accredited by: RVA, DAkkS, SCES, DANAK, A2LA, GOST, SWEDAC, UKAS, NABL, NATA, ÖKD, SIT.







Availability: MasterScanner XPL-C scan ranges

Model	200	300
Range external measurements	1,0 – 200 mm	1,0 – 290 mm
Range internal measurements	2,5 – 220 mm	2,5 – 300 mm
Scan range	100 / 200 mm	100 / 200 mm
Min. Pitch	0,1 mm	0,1 mm
Weight	600 kg	620 kg
Measurement uncertainty		
Thread ring gauges, parallel or tapered (minor diameter over 10	mm, partial flank angles \geq 27°)	
Minor diameter	3,0 µm + 5.10 ⁻⁶ ·ℓ	3,0 μm + 5.10 ⁻⁶ ·ℓ
Effective pitch diameter	3,0 µm + 5.10 ⁻⁶ -ℓ	3,0 µm + 5.10 ⁻⁶ -ℓ
Pitch	1,0 µm + 5.10 ⁻⁶ .∕	1,0 µm + 5.10 ⁻⁶ -∕
Flankangles (right and left side)	0°6'0"	0°6'0"
Taper	0,1°	0,1°
Thread ring gauges, parallel or tapered (minor diameter 2,5 to 1	0 mm, partial flank angles \geq 27°)	
Minor diameter	3,5 μm + 5.10 ⁻⁶ .ℓ	3,5 µm + 5.10 ⁻⁶ -ℓ
Effective pitch diameter	3,5 µm + 5.10 ⁻⁶ .∕	3,5 µm + 5.10 ⁻⁶ ·ℓ
Pitch	1,0 µm + 10 ⁻⁶ .ℓ	1,0 µm + 10 ⁻⁶ ·ℓ
Flankangles (right and left side)	0°6'0"	0°6'0"
Taper	0,1°	0,1°
Thread plug gauges, parallel or tapered (major diameter over 1 r	nm, partial flank angles \geq 27°)	
Major diameter	3,0 μm + 5.10 ⁻⁶ .ℓ	3,0 µm + 5.10 ⁻⁶ ⋅/
Effective pitch diameter	3,0 µm + 5.10 ^{−6} -ℓ	3,0 μm + 5.10 ⁻⁶ -/
Pitch	1,0 µm + 10 ⁻⁶ .ℓ	1,0 µm + 10 ^{−6} -ℓ
Flankangles (right and left side)	0°6'0"	0°6'0"
Taper	0,1°	0,1°
Plain gauges, parallel or tapered (diameter over 10 mm)		
Internal diameter ring gauges	2,0 µm + 5.10 ⁻⁶ ·ℓ	2,0 μm + 5.10 ⁻⁶ ·ℓ
External diameter plug gauges	2,0 μm + 5.10 ⁻⁶ .ℓ	2,0 µm + 5.10 ^{−6} .ℓ
Taper	0,1°	0,1°
Plain gauges, parallel or tapered (diameter 1 to 10 mm)		
Internal diameter ring gauges	3,0 μm + 5.10 ⁻⁶ .ℓ	3,0 µm + 5.10 ⁻⁶ .ℓ
External diameter plug gauges	3,0 µm + 5.10 ⁻⁶ .ℓ	3,0 µm + 5.10 ⁻⁶ .ℓ



IAC utilizes the highest quality measuring systems from Heidenhain



Transducer system Opto-electronic HEIDENHAIN scales Resolution As from 0,01 µm Air bearings on granite Linear bearing Actuators Controlled DC actuators Measuring force system Computer controlled in 2 directions Computer Integrated LINUX computer

Air supply 6 bar / 90 psi, oil and water free 220V, 50Hz / 110V, 60Hz Electric power

Ask for more: The IAC Comparison Table

FEATURES	IAC XPL-C / XPL	Conventional methods*
Accreditation to ISO 17025	V	/
7.00.001.001.001.001.0001.0000		•
Plain ring and plug gauges		
Setting rings and plugs	<i>V</i>	<i>V</i>
Tapered rings and plugs	<i>∨</i>	With difficulty
Thread ring and plug gauges Parallel & Conical		
Effective diameter		
Simple effective diameter (BSW, BS, Unified, JIS etc)	<i>∨</i>	<i>V</i>
Diameter equivalent	<i>∨</i>	X
Virtual diameter	<i>∨</i>	x
Minor diameter	<i>∨</i>	x
Major diameter	<i>∨</i>	x
Pitch	<i>∨</i>	With difficulty
Accumulated pitch errors	<i>∨</i>	With difficulty
Partial Flank angles Left and Right	<i>∨</i>	x
Profile angle	<i>V</i>	x
Straightness deviations of flanks	<i>V</i>	x
Taper of conical threads	<i>V</i>	x
API 5B (Incl. Buttress) & API 7-2 Measurement Option	<i>V</i>	x
Advanced Thread Tolerance Libraries	<i>V</i>	x
Overall Graphical presentation of all measured		
thread parameters in the tolerance zones	<i>V</i>	x
Concentricity of major and minor diameter		
with reference axis effective diameter	V	x
Automatic centering of the gauges		
Integrated conversion from internal to external thread		
and vs. via COSIMEX	in a few seconds	x
All directional compensation of wear of stylus		
Special Applications		
Contour and diameter measurement of ball bearings,		
ball spindles, etc.	V	×
DXF transfer to CAD		
Interface by RS232 or LAN Standard Option		
Easy switch between Metrical and Imperial systems		
ss small settles. The final and importal systemo	Ocalidat dilimini	The second secon

^{*} e. g. Universal Lenght Measuring Machine, Metroscope, SIP, Mahr, ULM, Helios, Pratt & Whitney, etc.

Precision **Unlimited**:

At your service wherever you are!



We are proud to work with strong partners in several important markets.

Over and above that. we operate worldwide, wherever precision measurement is needed. So, please don't hesitate to contact us, and we will work out what we can do to meet your individual needs.

Dealer USA

MasterScanner USA, LLC

- 7158 Industrial Park Blvd. Mentor, Ohio 44060
- +1 440 918 0001
- <u>+</u>1 440 918 0500
- info@microlabs-inc.com
- www.masterscannerusa.com www.microlabs-inc.com

Dealer Canada

Marsh Metrology

- 2 1016 C Sutton Drive Burlington, L7L 6B8, Ontario
- +1 (905) 331-9783
- +1 (905) 331-5991
- info@marshinst.com
- www.marshmetrology.com

Dealer United Arab Emirates | Dealer Brazil

Sun Power-Gen FZCO

- Plot S-10810 Jafza South PO-Box 262165 Jebel Ali Dubai
- +971 4 886 2800
- +971 4 886 2801
- info@sunpower.ae
- www.sunpower.ae

VAS Tecnologia Industrial

- Rua São Francisco 506 09530-050 Santo Antônio São Caetano do Sul, SP
- +55 11 4232-3280
- vas@vastecnologia.com.br
- www.vastecnologia.com.br

Dealer China

Dantsin Rui-Hua Technologies Co. Ltd.

- A2105, Dongyu Building, Shuguang Xili, Jia 1#, **Chaoyang District** Beijing 100028, China P.R.
- +86 10 5822 0390/1/2/3/4/5
- +86 10 5822 0398
- henry.zhao@263.net.cn
- www.dantsin.com

Dealer Japan

CKB Corporation

- 4F Yamada Aoyama Bldg. 2-10-6, Shibuya, Shibuya-ku 150-0002, Tokyo
- +81 3 3498 2131
- +81 3 3498 2366
- info@ckb.co.ip

Dealer India

Trimaster Metrology

- 202 Vasuda Equinox Old Mumbai-Pune Highway Bopodi Pune 411 003
- +91 77670 14764 contact@trimaster.in
- http://trimaster.in

Dealer Hungary

- Médian L+G Méréstechnikai Kft.
- Szél u. 19 1035 Budapest
- +36 (1) 3881059
- +36 (1) 3881059
- medianlg@medianlg.hu
- www.medianlg.hu

Dealer Israel Microtech Ltd.

- 4 Hamelakha St. Binyamina 3055101
- +972-4-6295050
- <u>+972-4-6295051</u>
- office@microtech.co.il http://microtech.co.il

Dealer Taiwan

Asia Technical Services

- **1** FI. NO.39 Lane 180, Guang Fu S. Rd. Taipei 106, Taiwan
- +886 (2) 2781-7892
- +886 (2) 2776-4387
- celia@asiatec.com
- www.asiatec.com

Dealer Norway - Drammen

HTS Verktøy AS

- ✓ Ingeniør Rybergs gate 97 3027 Drammen
- +47 32 99 09 00
- hts@htsverktoy.no
- http://www.htsverktoy.no

www.ckb.co.jp

Dealer Norway - Skien

Øberg Verktøy As

- Rødmyrsvingen 88 3735 Skien
- +47 35 50 54 40
- +47 35 50 54 45
- post@obergverktoy.no
- www.obergverktoy.no

IAC Geometrical Engineers B.V.



() +31 591 644 103 +31 591 648 064

www.iac-instruments.com







@info@iac-intruments.com